




BAG FIX™ - Securing Pallet Loads of Plastic and Paper Bags
BAG FIX™ - Protection de palettes pour sacs en plastique et en papier
BAG FIX™ - Palettensicherung für Plastik- und Papiersäcke

Type W 49-J

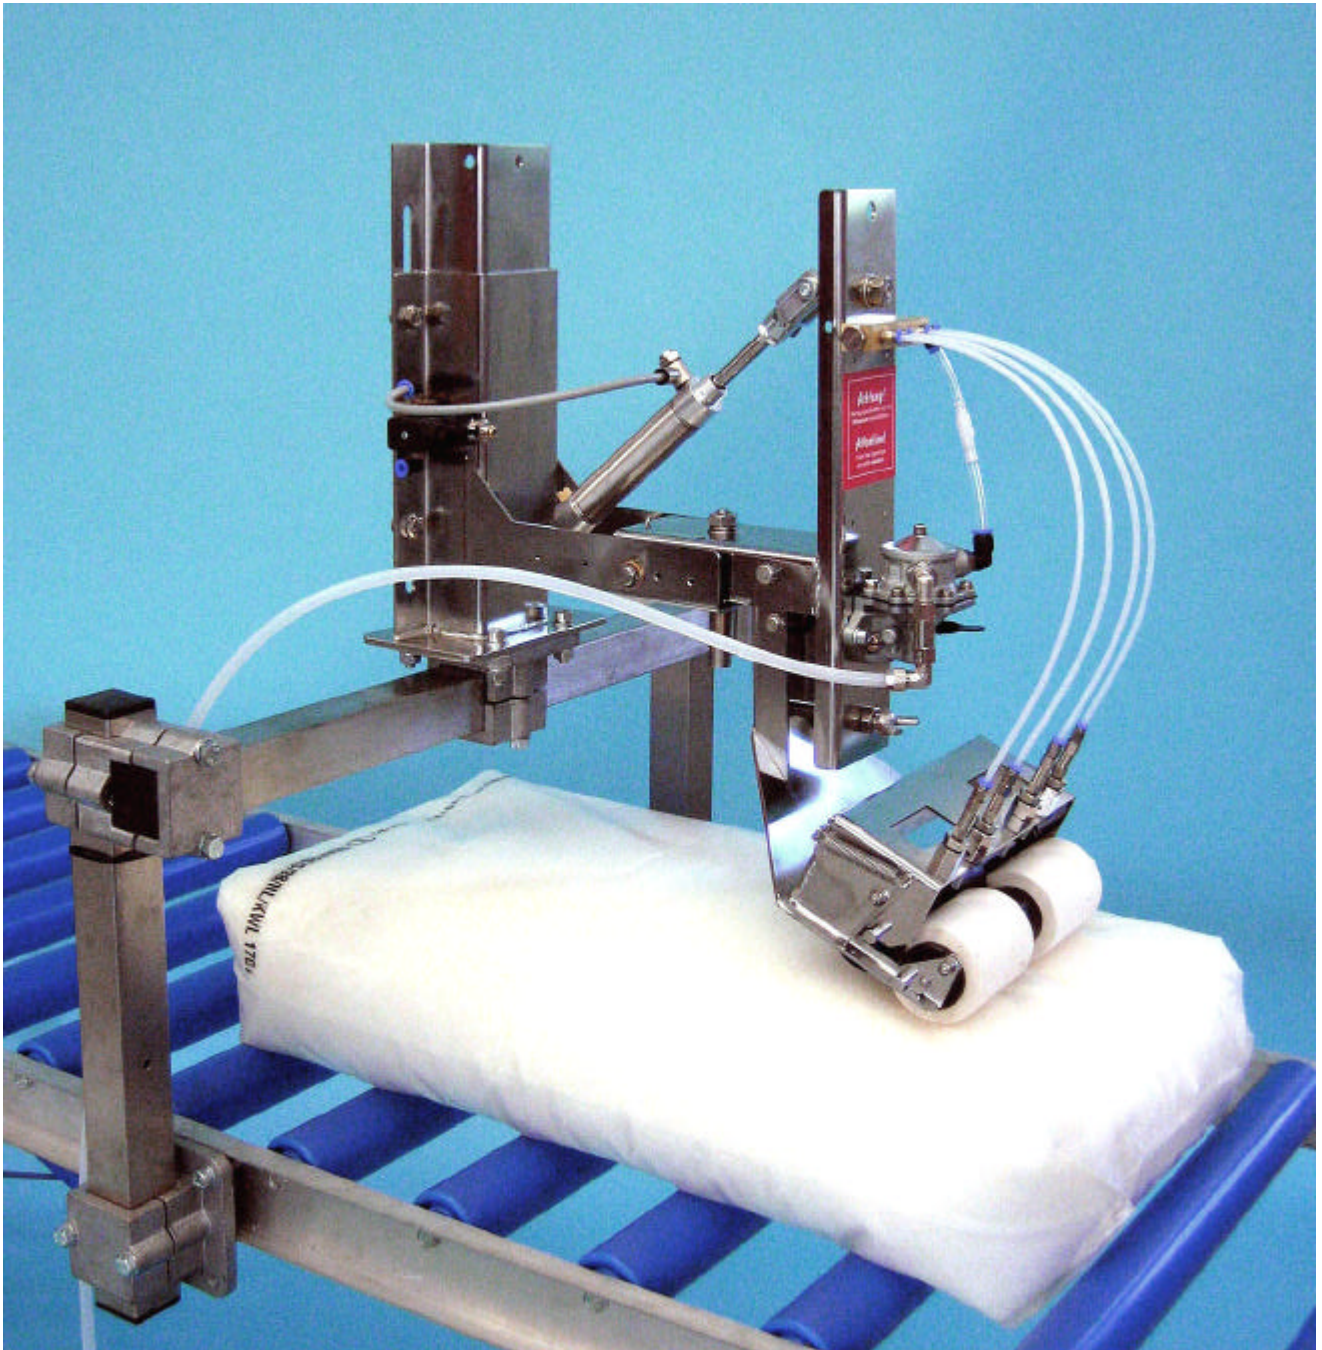


System: Sponge Roller Application without Power Supply

Système : Application par rouleaux sans énergie d'origine extérieure

System: Walzenauftrag ohne Fremdenergie

BAG FIX™ Type W 49-J

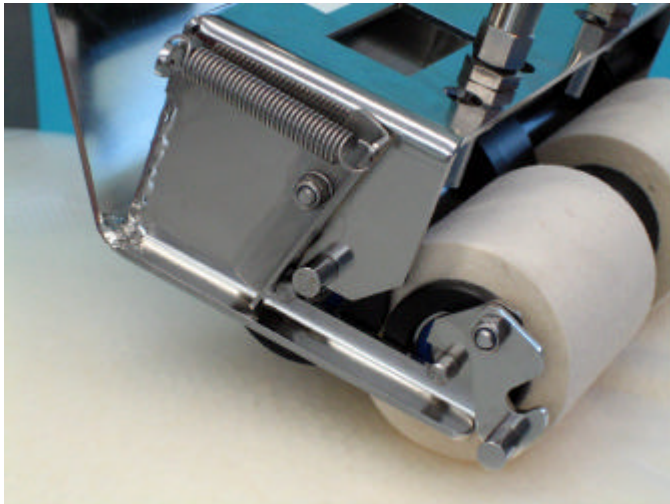

Application:

This system is designed to apply water-soluble and solvent-free GRIP FIX™ (antislip agent) for pallet stability.

The main usage is for flat plastic bags.

The general function is that the bag lifts the application roller and this generates a pump stroke of the diaphragm pump.

A small amount of GRIP FIX™ (0.5 - 1 gram) is applied with a sponge or felt roller over the bag at the entrance of the palletizer, with the exception of the last layer.

System:

Pumping System:

Diaphragm pump is operated through the lifting of the application head caused by moving bags on the conveyor belt

Application Head:

Double roller with pad roller for GRIP FIX™ distribution

Application Pattern:

Sponge or felt roller application

Advantages:

- **Power Supply:** This system operates without power supply
- **Application head:** Simple replacement of rollers for cleaning
- **Closed system** from the delivery container through the nozzles
- **Height Adjustment:** Can be manually adjusted approx. 110 mm with a handle and automatically adjusted by 100mm depending upon bag size
- **GRIP FIX™ adjustment:** Via adjustment screw
- **Skip gluing** the top layer through interface of PLC
- **Change of delivery drum** without stopping the production process
- Can be integrated into all conveyer systems

Technical Data:

- Dimensions of system: 490 x 250 x 530 mm
- Finish: Stainless steel
- Weight: 13 kg



GRIP FIX™ Type (Cold-Glue):

- Environmentally-friendly
- Water-based and solvent-free
- For foodstuff packaging

Cleaning:

Clean only with soapy water

Standard:

CE- Reference